


UCFL

Locking collar


Standard bearings - reinforced version

Main features:

- Housing in reinforced polyamide
- Chrome steel ball bearing (pre-lubricated)
- Nickel-plated brass mounting hole spacers
- Nickel plated steel or SS grease nipple with self-forming thread M6
- Stainless steel washers

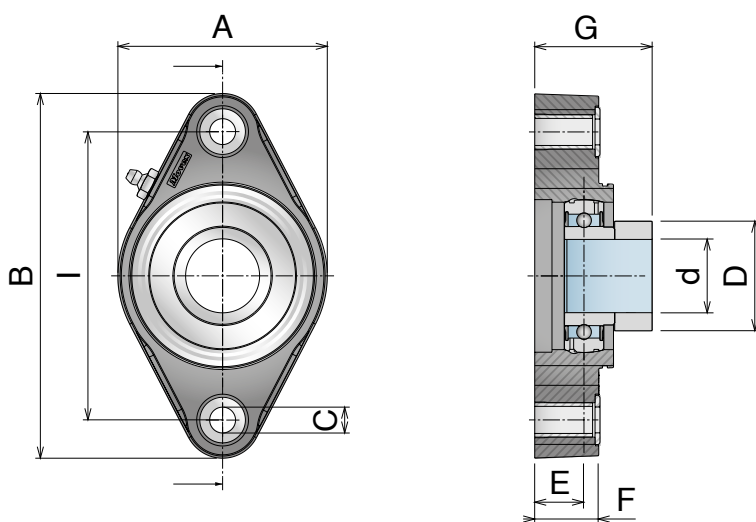

FIXING METHOD
(ECCENTRIC RING)



LOCKING COLLAR

Chrome Steel											Caps (Accessories)	
Article-Number	Series	d	I	A	B	C	D	E	F	G	Close	Open
80210	UCFL 204	20	90	62	116	11	33,3	16	20	39,9	89004	89054-20
80200	UCFL 204		90	71	130	11	33,3	17,5	22,5	41,4	89001	89051-20
80221	UCFL 205/90	25	90	85	116	11	38,1	14,5	20	37,9	89005	89055-25
80201	UCFL 205/90		90	71	130	11	38,1	16,8	22,5	40,2	89001	89051-25
80211	UCFL 205		99	71	130	11	38,1	16,8	22,5	40,2	89001	89051-25
80222	UCFL 206/90	30	90	85	116	11	44,5	14,5	20	42,2	89005	89055-30
80232	UCFL 206/99		99	85	130	11	44,5	20	26	47,7	89002	89052-30
80202	UCFL 206/99		99	85	148	11	44,5	20	26	47,7	89002	89052-30
80212	UCFL 206		117	85	148	11	44,5	20	26	47,7	89002	89052-30
80203	UCFL 207/117	35	117	93	148	11	55,6	19,5	26	49,9	89003	89053-35
80223	UCFL 207/117		117	112	148	11	55,6	19,5	26	49,9	89003	89053-35
80213	UCFL 207		130	93	162	11	55,6	19,5	26	49,9	89003	89053-35
80204	UCFL 208/117	40	117	93	148	11	60,3	19	26	53,7	89003	89053-40
80224	UCFL 208/117		117	112	148	11	60,3	19	26	53,7	89003	89053-40
80214	UCFL 208		130	93	162	11	60,3	19	26	53,7	89003	89053-40