

556 GT Open Surface 25% Tappeto Modulare Curvilineo Serie 556 GT, H=12,7 M=3"

Side Flex Modular Belt Series 556 GT, H=12,7 M=3" / Kurvengängige Mattenkette Serie 556 GT, H=12,7 M=3"

CODE STRUCTURE GUIDE (Example)

Backflex radius min.: 25 mm

5433	01	0009	A
Series	*Material	Width	Version

pg. 370	pg. 771>781

*Material

LFA - Code 01

Low friction Acetal

Max w. load:

Straight: 30000 N/m

Curve: 2000 N

Weight: 7,7 kg/m²

Temp. range dry: -40÷80 °C

Temp. range wet: -40÷65 °C

Pin material: PBT white

Top rubber: 50 ShA-Dark grey

LFB - Code 23

Low friction Acetal

Max w. load:

Straight: 30000 N/m

Curve: 2000 N

Weight: 7,7 kg/m²

Temp. range dry: -40÷80 °C

Temp. range wet: -40÷65 °C

Pin material: PBT white

Top rubber: 50 ShA-Black

PPB - Code 24

Polypropylene

Max w. load:

Straight: 19500 N/m

Curve: 1300 N


Weight: 6,0 kg/m²

Temp. range dry: 4÷104 °C



Temp. range wet: 4÷104 °C

Pin material: PP blu


Top rubber: 50 ShA-Black

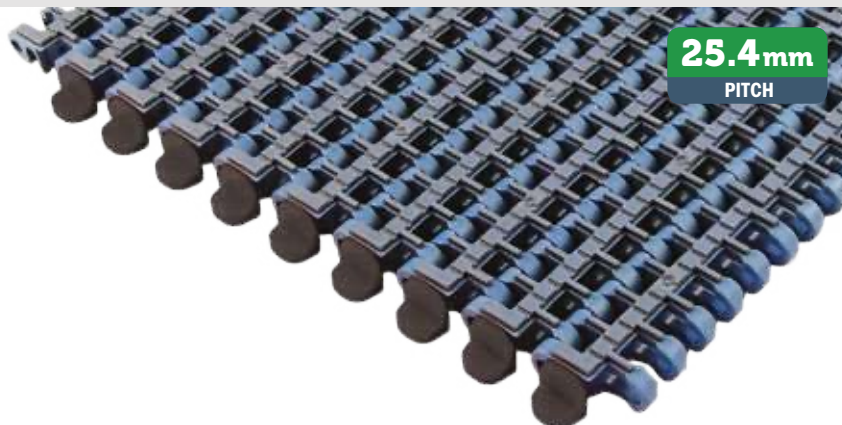

25.4mm
PITCH

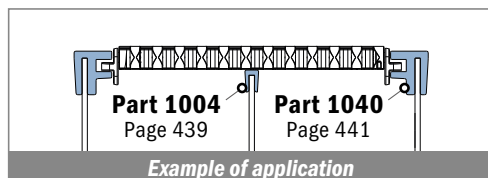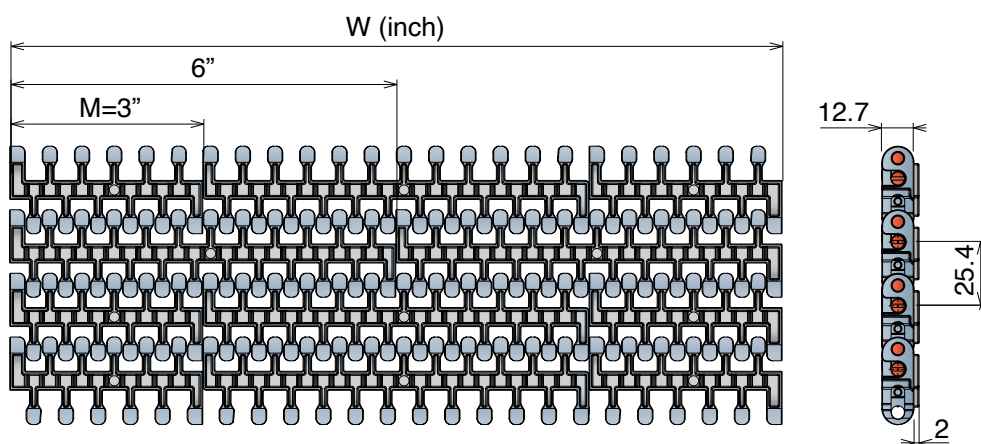


STANDARD




Series	Material	Width	Version	min radius
5433	*	0003	A	145
5433	*	0006	A	290
5433	*	0009	A	435
5433	*	0012	A	580
5433	*	0015	A	725
5433	*	0018	A	890
5433	*	0021	A	1040
5433	*	0024	A	1250

TAB



Series	Material	Width	Version	min radius
5433	*	0003	B	145
5433	*	0006	B	290
5433	*	0009	B	435
5433	*	0012	B	580
5433	*	0015	B	725
5433	*	0018	B	890
5433	*	0021	B	1040
5433	*	0024	B	1250


TAB/POSITIONER



Series	Material	Width	Version	min radius
5433	*	0003	C	145
5433	*	0006	C	290
5433	*	0009	C	435
5433	*	0012	C	580
5433	*	0015	C	725
5433	*	0018	C	890
5433	*	0021	C	1040
5433	*	0024	C	1250

NEW

TAB-S



Series	Material	Width	Version	min radius
5433	*	0003	D	145
5433	*	0006	D	290
5433	*	0009	D	435
5433	*	0012	D	580
5433	*	0015	D	725
5433	*	0018	D	890
5433	*	0021	D	1040
5433	*	0024	D	1250