

525 HD GT

Tappeto Modulare 525 HD GT, H=8,7 M=85
 Modular Belt Series 525 HD GT, H=8,7 M=85 / Modulare Mattenkette 525 HD GT, H=8,7 M=85

CODE STRUCTURE GUIDE (Example)


Backflex radius min.: 25 mm

5263	01	0085	A
Series	*Material	Width	Version

		
pg. 359-360	307/311/314	pg. 771>781

SAMPLE BOX

Art.-Nr. 5263018888A

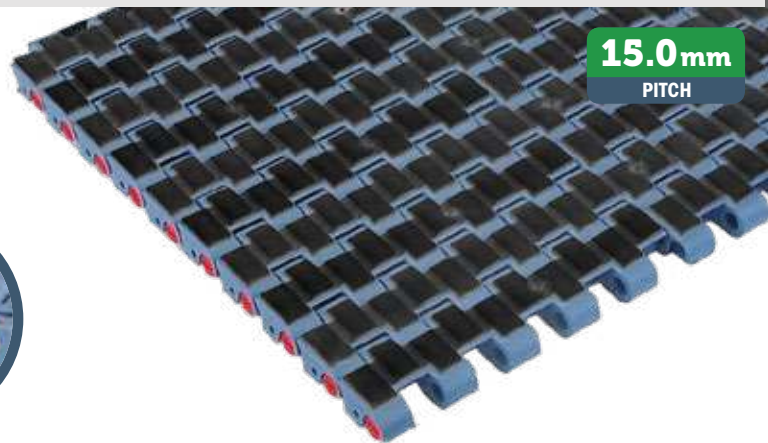

Metric Size

*Material

LFA - Code 01

Low friction Acetal

Easy Delivery

Max w. load: 25500 N/m
 Weight: 10,35 kg/m²
 Temp. range dry: -40÷80 °C
 Temp. range wet: -40÷65 °C
 Pin material: PBT white
 Top rubber: 50 ShA- Dark grey

PP - Code 02

Polypropylene


Max w. load: 15500 N/m
 Weight: 8,7 kg/m²
 Temp. range dry: 4÷80 °C
 Temp. range wet: 4÷80 °C
 Pin material: PP blue
 Top rubber: 50 ShA- Pigeon blue

MX - Code 03


Performance PBT

Max w. load: 20500 N/m
 Weight: 10,35 kg/m²
 Temp. range dry: -40÷120 °C
 Temp. range wet: -40÷60 °C
 Pin material: POM grey
 Top rubber: 50 ShA- Dark grey


Version A - Standard

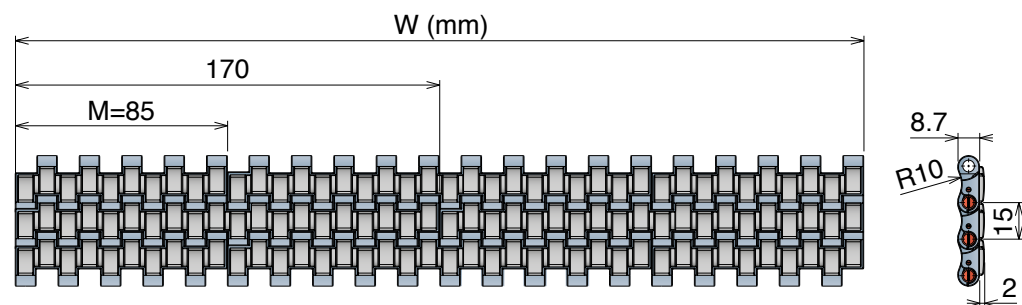

Version B - With 1 Positioner

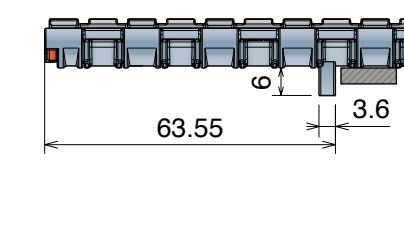

Version C - With 2 Positioner

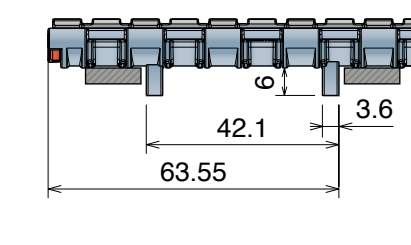

Version A - Standard

Series	Material	Width	Version
5263	*	0085	A
5263	*	0170	A
5263	*	0255	A
5263	*	0340	A
5263	*	0425	A
5263	*	0510	A
5263	*	0595	A
5263	*	0680	A
5263	*	0765	A
5263	*	0850	A
5263	*	0935	A
5263	*	1020	A
5263	*	1105	A
5263	*	1190	A
5263	*	1275	A
5263	*	1360	A
5263	*	1445	A
5263	*	1530	A

Version B - With 1 Positioner

Series	Material	Width	Version
5263	*	0085	B
5263	*	0170	B
5263	*	0255	B
5263	*	0340	B
5263	*	0425	B
5263	*	0510	B